

DATASHEET

SPD005GA Pressure Sensor

last update
oktober 4, 2016


reference
spd005ga n

page
1/1

SPD005GA

This Smartec pressure sensor has an amplified analogue output. The sensor is compensated for offset, sensitivity, temperature drift and nonlinearity.

The sensor is available in the range from 5 to 100 psi. Other ranges on request. Available in Gauge and Absolute type. The output is ratiometric to the power supply voltage. @ 5 V power voltage the output span is 0.5 to 4.5 V. The SPD analogue series can be considered as an "analogue" successor of the SPD series.

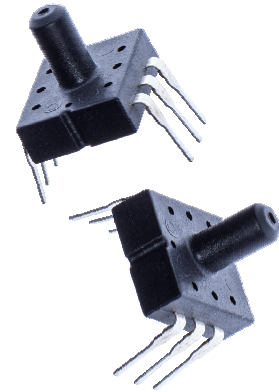

Electrical Characteristics


Performance Characteristic at $V_{cc} = 5V$ excitation @ 25 °C.

Parameter	Min	Typ	Max	Units
Supply Voltage	2.7	5	5.5	V
Supply Current			3	mA
Pressure range (fs)	0		5	psi
Zero Output *)	0.428	0.5	0.572	Vdc
Span Output *)		4.00		Vdc
Max output current			2.2	mA
Accuracy **)			±1.8	%FS
Response time		25		ms
Pressure overload			3x	psi
Operating temperature	-20		85	°C
Storage temperature	-40		125	°C

Wetted materials are: Pyrex Glass, Epoxy and silicon

*) Output is ratiometric to supply voltage

**) all errors included, temperature compensation over 50 °C

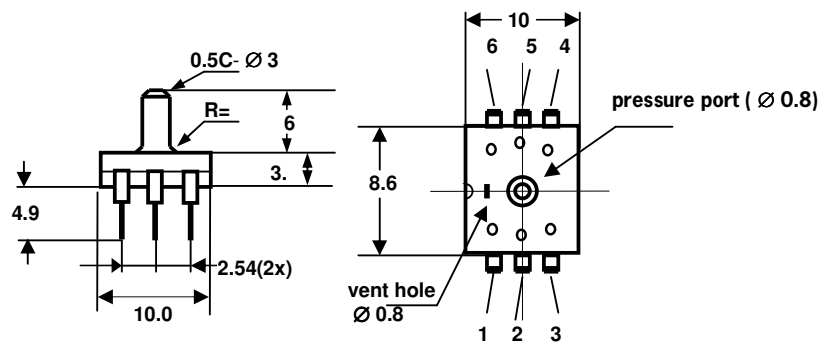

Pin Description

1	NC
2	Vcc
3	GND
4	Vcc
5	Out
6	GND

Do NOT connect NC pins
Apply 100nF between Vcc
and Gnd.

sales@smartec-sensors.com